




## ZX70 FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core Processor
- Verified as Android enterprise recommended<sup>1</sup>
- 7" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP67 certified
- Optional barcode reader, RFID reader

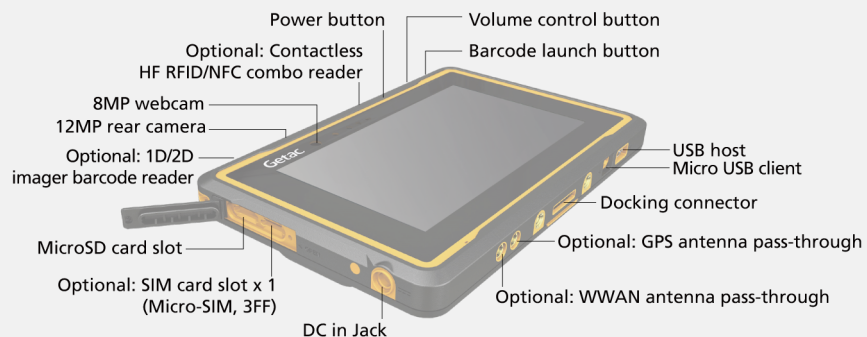

# ZX70 FULLY RUGGED TABLET

## SPECIFICATIONS

<b>Operating System</b>	Android™ 10.0
<b>Mobile Computing Platform</b>	Qualcomm® Snapdragon™ 660, Octa-core 1.95GHz Max. 2.2GHz
<b>VGA Controller</b>	Qualcomm® Adreno™ 512 GPU
<b>Display</b>	7" IPS TFT LCD HD (1280 x 720) Protection film LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
<b>Storage &amp; Memory</b>	4GB LPDDR4 64GB eMMC
<b>Keyboard</b>	Power button 3 tablet programmable buttons
<b>Pointing Device</b>	Touchscreen - Capacitive multi-touch screen
<b>Expansion Slot</b>	Optional: 1D/2D imager barcode reader
<b>I/O Interface</b>	8M pixels webcam x 1 12M pixels autofocus rear camera x 1 DC in Jack x 1 USB 2.0 (Host) x 1 MicroUSB 2.0 (Client) x 1 MicroSD x 1 Docking connector (Pogo/JAE) x 1 Optional: SIM card slot x 1 (Micro-SIM, 3FF) Optional: RF antenna pass-through for GPS and WWAN
<b>Communication Interface</b>	Wi-Fi 802.11ac Bluetooth (v5.0) <sup>ii</sup> Dedicated GPS Optional: 4G LTE mobile broadband <sup>iii</sup>

# ZX70 FULLY RUGGED TABLET

<b>Pre-installed software</b>	Getac File Browser Getac Camera Getac Input Method DeployeXpress Client Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, Play music, Play movies, Duo and photos)
<b>Security Features</b>	Optional: HF RFID/NFC combo reader <sup>iv, v</sup>
<b>Power</b>	AC adapter (25W, 100-240VAC, 50/60Hz) Li-ion battery (3.8V, typical 8480mAh; min. 8220mAh)
<b>Dimension (W x D x H) &amp; Weight</b>	218 x 142 x 27mm (8.58" x 5.6" x 1.08") 762g (1.68lbs) <sup>vi</sup>
<b>Rugged Features</b>	MIL-STD-810H certified IP67 certified Vibration & 6ft (1.8m) drop resistant <sup>vii</sup> Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)
<b>Environmental Specifications</b>	Temperature <sup>viii</sup> : - Operating: -21°C to 60°C / -6°F to 140°F - Storage: -40°C to 71°C / -40°F to 160°F  Humidity: - 95% RH, non-condensing

# ZX70 FULLY RUGGED TABLET

## Accessories

AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)  
Capacitive stylus with tether  
Pen holder  
Wrist strap

### Optional:

Carry bag  
AC adapter (25W; 12V/2A, 100-240VAC; 50/60Hz)  
Office dock AC adapter (60W, 110-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Capacitive stylus with tether  
Protection film  
Shoulder strap (2-point)  
Wrist strap  
Rotating hand strap with kickstand and stylus holder  
Vehicle cradle  
USB to RS232 converter cable  
Docking connector to HDMI converter cable  
Vehicle dock  
Office dock  
Pen holder

## Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

### Standard

3 years Bumper-to-Bumper

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Units with 4G LTE option comes with an embedded SIM card slot.
- IV. 13.56MHz HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- V. HF RFID/NFC combo reader applies to US & EU.
- VI. Weight and dimensions vary from configurations and optional accessories.
- VII. Drop test results vary from configurations and optional accessories.
- VIII. Tested by an independent third-party test lab following MIL-STD-810H.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

# ZX70 FULLY RUGGED TABLET

	Getac-made Vehicle Dock (JAE)	Havis Vehicle Dock (Pogo,power only)	Havis Vehicle Dock (JAE)	Gamber-Johnson Charging Cradle (Pogo)	Havis Vehicle Dock (Pogo)	Office Dock (JAE)	Office Dock (Pogo)
Serial Port	1	-	1	-	1	-	-
Speaker	1	-	-	-	-	-	-
Audio Output	1	1	1	-	1	1	1
DC in Jack	1	1	1	1	1	1	1
USB	USB Host x 2	-	USB2.0 x 2	-	USB2.0 x 2	USB Host x 2 MicroUSB Client x 1	USB Host x 2
LAN	1	-	1	-	1	1	1
HDMI	1	-	1	-	-	1	-
RF Antenna Connector	(WWAN, GPS)	(WWAN, GPS)	(WWAN, GPS)	-	(WWAN, GPS)	-	-

## Getac (UK) Ltd.

Getac House, Stafford Park 12,  
Telford, Shropshire TF3 3BJ, United Kingdom  
Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com | www.getac.com/en/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only,  
available specification shall be subjected to quotation by request.