

# BILP - BILPA

## PRICE COMPUTING RETAIL SCALE

LAUMAS®



M

CE-M certificate: 2014/31/EU, EN 45501, OIML R76 class III, legal for trade use with CE marking and conformity assessment (initial verification).



operator's side

BILP



customer's side



SWIVEL  
DISPLAY  
COLUMN



BILPA

CAPACITY	kg	DIVISION (g)	NET WEIGHT (kg)	CODE	NET WEIGHT (kg)	CODE
3/6		e=1/2	3.3	BILP6	4.5	BILPA6
6/15		e=2/5	3.3	BILP15	4.5	BILPA15
15/30		e=5/10	3.3	BILP30	4.5	BILPA30


### DESCRIPTION

- Stainless steel plate.
- RS232 output for connection to external printer.
- Backlit LCD displays on both sides, 3x 6-digit (20 mm height).
- 20-key waterproof keyboard.
- Bubble level and adjustable feet.
- 6 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- Power supply included.
- Auto power-off.

### MAIN FUNCTIONS

- Simultaneous display of: weight, unit price, amount.
- 100 storable items (PLU) with unit price.
- Price unit setting: €/kg - €/100 g.
- Automatic cancellation of price and tare.
- Totalization of partial amounts.
- Automatic change calculation.
- Optional non-fiscal receipt printing via STAVT II external printer: customizable header, date, time, net weight, unit price, amount per item, total amount.

### DIMENSIONS (mm)

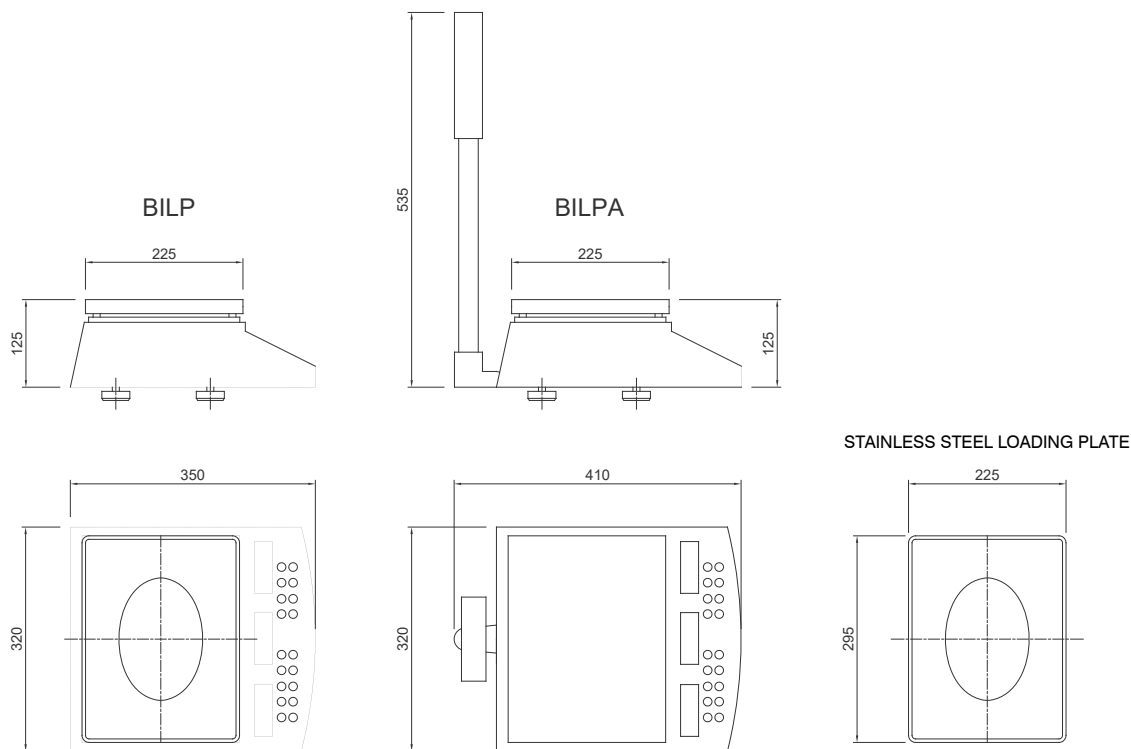

### TECHNICAL FEATURES

Power supply	230 VAC $\pm$ 10%
Internal battery	6 V, 4 Ah capacity
Linearity	< 0.01% full scale
Display resolution	3000
Units of measure	kg
Serial port	RS232
Baud rate	2400, 4800, 9600, 19200 (bit/s)
Humidity (condensate free)	< 85%
Storage temperature	-10 °C + 50 °C
Working temperature	-10 °C + 40 °C

### OPTIONS ON REQUEST

	DESCRIPTION	CODE
	Stainless steel deep tray. Dimensions: 230x300x40 mm.	PIATTOBAC
	Panasonic rechargeable battery mod. LC-R064R5P - 6 V, 4.5 Ah capacity.	BATTERIA6V4AH
	Desktop thermal printer.	STAVTII

The Company reserves the right to make changes to the technical data, drawings and images without notice.